


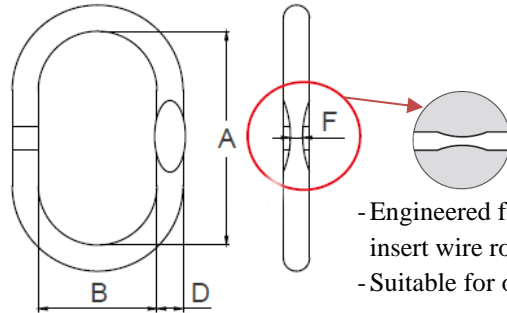

Wah Yong (M) Sdn Bhd


198201009356 (89080-D)

DA FORGED OBLONG MASTER LINK

-40°C

- Engineered flat makes it simple to insert wire rope thimbles on our links.
- Suitable for omega links.

Item Code	WLL β 0-45° ton	Proof Load kN	D mm	A mm	B mm	Weight kg
MLO38.3T45MMDNVWXX	38.3	939	45	340	180	12.8



Item Code	WLL β 0-45° ton	Proof Load kN	D mm	A mm	B mm	Weight kg
MLO24T36MMDNVFXX	24	588	36	285	155	6.9

- Tested and manufactured in accordance with DNV 2.7-1, EN 1677-4, ASME B30.26.
- Certified by DNV 2.7-1.
- Fatigue rated to 20,000 cycles at 1.5 times the Working Load Limit (WLL).
- Charpy tested in accordance with DNV 2.7-1.
- Proof Load tested to 2.5 times the Working Load Limit (WLL).
- Design factor 5:1.

Contact our support & sales team. We are here to help.

24, Jalan Mega 1/7, Taman Perindustrian Nusa Cemerlang, 79200 Iskandar Puteri, Malaysia

Phone: +607-535 3380 | Mobile: +6010-762 2880 | Email: sales@wahyong.com | Website: www.wahyong.com