



Wah Yong (M) Sdn Bhd

198201009356 (89080-D)

G80 D RING WITH SPRING



DRS Type



Item Code	WLL	A	B	D	M	N. Weight
	tons	mm	mm	mm	mm	kg
DRS03.15T	3.15	45	94	17	42.5	0.69
DRS05.3T	5.3	55	118	22	50	1.46
DRS08T	8	70	141	26.5	66.5	2.5
DRS10T	10	85	165	28	76	3.59
DRS15T	15	97	188	34	90	5.79

- Weld on plain surfaces as a lifting point, or to be used as a fixed anchor points for spreader beam attachment.
- Can also be used as an anchor point for load restraint applications.
- DRS type is equipped with a spring which enables the D ring to stay in the desired position.
- Quenched & tempered.
- 100% magnaflux crack detection.
- Standard EN1677
- Material: Forged alloy steel
- Proof load at 2.5 times of the Working Load Limit.
- Safety factor 4:1
- Powder coated surface finish.

Contact our support & sales team. We are here to help.

24, Jalan Mega 1/7, Taman Perindustrian Nusa Cemerlang, 79200 Iskandar Puteri, Malaysia

Phone: +607-535 3380 | Mobile: +6010-762 2880 | Email: sales@wahyong.com | Website: www.wahyong.com





Wah Yong (M) Sdn Bhd

198201009356 (89080-D)

G80 WELD-ON POINT WITH SPRING



CODE "DAA"

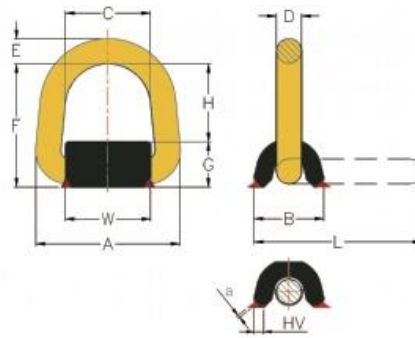

Item Code	WLL	D	F	H	K	L	R	W	N. Weight
	tons	mm	mm	mm	mm	mm	mm	mm	kg
8-057-03	3	17	34	60	48	112	29	58	0.9

- Pivots through 180°.
- Manufactured from forged alloy steel, quenched and tempered.
- Manufactured and tested in accordance with EN1677-1.
- Load rated parts are 100% magnaflux crack detected.
- Individual forged parts are traceable to Test Certification.
- Proof tested to 2.5 times the WLL.
- Fatigue rated to 1.5 times the WLL.
- All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.
- WLL forged onto each product for quick and easy identification.
- Lugs designed to assist the welding process.
- A protected spring keeps the load ring in a required position. The parts are connected in such a way that they remain captive. The spring also reduces noise caused by vibrations.

Contact our support & sales team. We are here to help.

24, Jalan Mega 1/7, Taman Perindustrian Nusa Cemerlang, 79200 Iskandar Puteri, Malaysia

Phone: +607-535 3380 | Mobile: +6010-762 2880 | Email: sales@wahyong.com | Website: www.wahyong.com




Wah Yong (M) Sdn Bhd

198201009356 (89080-D)

G80 BOLT-ON TIE DOWN



CODE "DAB"

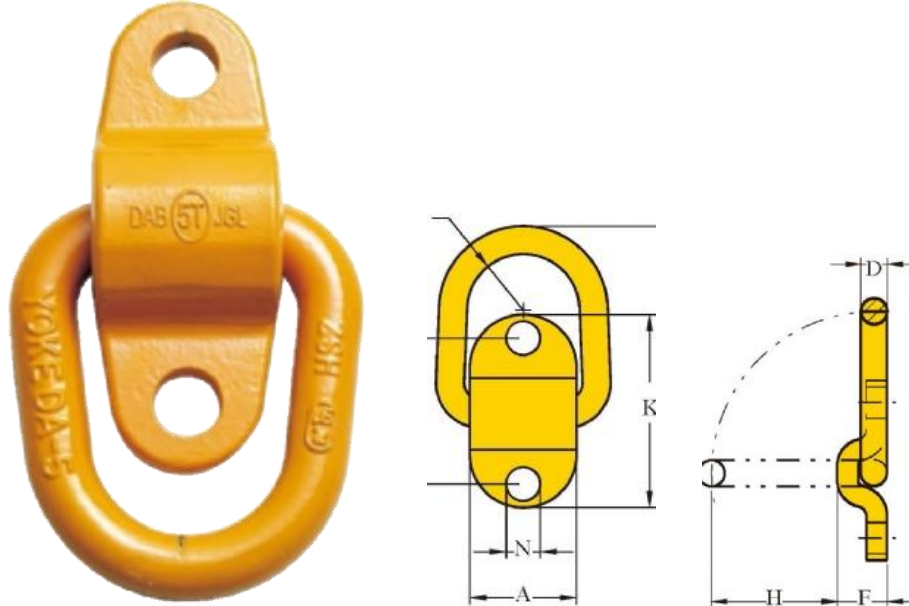

Item Code	WLL	A	B	D	F	H	K	L	N	R	N. Weight
	tons	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
8-058-5T	5	64	116	22	43	74	160	203	23	33	2.5

- Pivots 180° side loading allowed.
- Manufactured from forged alloy steel, quenched and tempered.
- Manufactured and tested in accordance with EN1677-1.
- Load rated parts are 100% magnaflux crack detected.
- Individual forged parts are traceable to Test Certification.
- Supplied without bolts; usage of Grade 10.9 or Grade 12.9 bolts is recommended.
- Individually proof tested to 2.5 times the WLL.
- Fatigue rated to 1.5 times the WLL.
- All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.
- Design factor 5:1
- Bolts of grade 10.9 & 12.9 are recommended

Contact our support & sales team. We are here to help.

24, Jalan Mega 1/7, Taman Perindustrian Nusa Cemerlang, 79200 Iskandar Puteri, Malaysia

Phone: +607-535 3380 | Mobile: +6010-762 2880 | Email: sales@wahyong.com | Website: www.wahyong.com