



# Wah Yong (M) Sdn Bhd

198201009356 (89080-D)

## CHAIN BLOCK CK TYPE

### Competitive Chain Block with Industrial Performance

#### Standard Features:

- Chain Block CK Type meets all pertinent world standards.
- Hardened steel rollers supporting the load sheaves run smoother and last longer than bearings.
- Spur gear efficiency reduces operator effort. Double pawl and double guide rollers enhance performance, safety and reliability.
- Load chain is alloy steel Grade 80 according to ISO 1687.
- Deformation indicators – two strategically placed marks allows for measurement to determine if the throat opening has changed thus indicating abuse or overload.
- Equipped with wide throat top and bottom drop forged hooks that are designed to bend slowly to warn of overloads
- Every chain block is operationally tested to % of the rated capacity and issued an individual test certificate with unique serial number.
- Safety factor 4:1 of the rated capacity.
- Easy remove top hook for 0.5t to 3t

#### Optional features:

- Overload protection system.
- Caged roller bearings on load sprocket.
- Zinc plated load chain.
- Cr plated side plate assemblies.
- Thrust bearings in bottom hook assembly.




**Contact our support & sales team. We are here to help.**

24, Jalan Mega 1/7, Taman Perindustrian Nusa Cemerlang, 79200 Iskandar Puteri, Malaysia

Phone: +607-535 3380 | Mobile: +6010-762 2880 | Email: [sales@wahyong.com](mailto:sales@wahyong.com) | Website: [www.wahyong.com](http://www.wahyong.com)



## CHAIN BLOCK CK TYPE

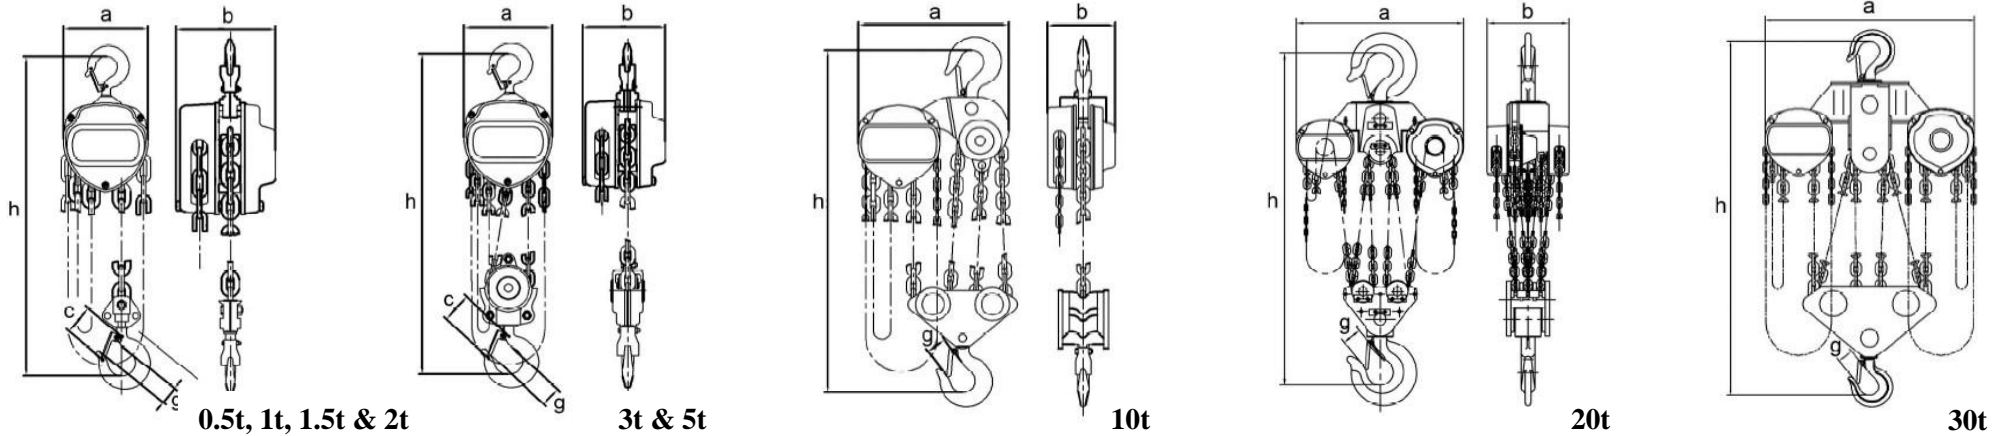

Item Code	Capacity (ton)	Standard Lift (m)	Chain Dia. (mm)	Pull to Rated Load (N)	Proof Load (ton)	a (mm)	b (mm)	c (mm)	h (mm)	g (mm)	Weight (kg)
CBCK00.5T02.5M-KT	0.5	2.5	6	-	-	125	123	35	280	27	8.0
CBCK00.5T03M-KT	0.5	3	6	267	0.75	125	123	35	280	27	8.8
CBCK01T02.5M-KT	1	2.5	6	-	-	147	140	45	306	33	10.2
CBCK01T03M-KT	1	3	6	375	1.5	147	140	45	306	33	11.0
CBCK01.5T02.5M-KT	1.5	2.5	8	-	-	183	158	47	368	33.5	15.4
CBCK01.5T03M-KT	1.5	3	8	357	2.25	183	158	47	368	33.5	16.5
CBCK02T03M-KT	2	3	8	471	3	183	158	52	444	37	17.8
CBCK03T03M-KT	3	3	8	375	4.5	183	158	62.5	520	43.5	25.0
CBCK03T05M-KT	3	5	10	-	-	183	158	62.5	520	43.5	32.4
CBCK05T05M-KT	5	5	10	-	-	214.5	185	78	616	51	50.6
CBCK10T05M-KT	10	5	10	392	15	388	185	-	700	64	74.0
CBCK20T05M-KT	20	5	10	392	25	635	195	-	1000	82	217.0
CBCK30T06M-KT	30	6	10	-	-	708	350	-	1500	82	319.0

**Contact our support & sales team. We are here to help.**

24, Jalan Mega 1/7, Taman Perindustrian Nusa Cemerlang, 79200 Iskandar Puteri, Malaysia

Phone: +607-535 3380 | Mobile: +6010-762 2880 | Email: sales@wahyong.com | Website: www.wahyong.com